




Licence exempt radio version of the popular Loadlink with 100 metres range.
 Supplied with easy to use two button handheld with push button control for tare and on/off
 Radiolink is fitted with standard alkaline batteries and has no external antenna.
 Calibrated in kg or tonnes, other units are available on request.
 May also be connected to a PC using our 'Desktop Controller' software package.
 All models are supplied with carry/storage case.

DIMENSIONS (SEE TABLE BELOW)

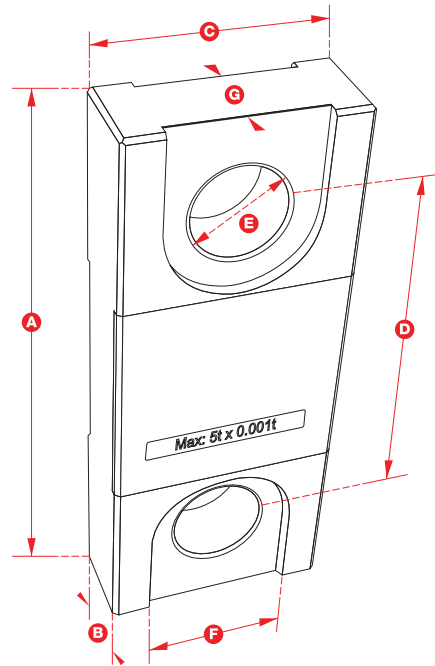

	Part Number	RLP250KG	RLP500KG	RLP1T	RLP2T5	RLP5T	RLP12T	RLP25T	RLP50T	RLP100T	RLP200T	RLP250T	RLP500T*
Capacity		250kg	500kg	1000kg	2.5t	5t	12t	25t	50t	100t	200t	250t	500t
Resolution		0.05kg	0.1kg	0.5kg	0.001t	0.001t	0.002t	0.005t	0.01t	0.05t	0.1t	0.1t	0.2t
Units		kg	kg	kg	t	t	t	t	t	t	t	t	t
Weight		1.5kg	1.5kg	1.5kg	1.5kg	2.2kg	3.5kg	5.2kg	10.9kg	37kg	80kg	80kg	260kg
Safety Factor		50:1	25:1	12:1	5:1	5:1	5:1	5:1	5:1	4:1	5:1	4:1	1.5 : 1
Battery Type	Handheld - 2 x AA Alkaline / Loadcell 4 x AA Alkaline												
Battery Life	Handheld - 400 hours / Loadcell 850 hours continuous												
Display Type	7 digit 8.8mm LCD												
Op Temp	-10 to 50c												
Accuracy	± 0.3% of applied load												
Frequency	2.4GHz												
Range	100 metres												
Data Rate	1 Update per second												
Protection	IP65												
Dimension A	204	204	204	204	249	305	340	424	608	690	690	900	
Dimension B	43	43	43	43	43	47	60	75	99	150	150	120	
Dimension C	101	101	101	101	101	101	110	163	255	305	305	380	
Dimension D	146	146	146	146	165	193	215	230	320	350	350	468	
Dimension E	24.5	24.5	24.5	24.5	38	47.5	55	76	108	125	125	183	
Dimension F	47.5	47.5	47.5	47.5	66								
Dimension G	19	19	19	19	32								
Crosby Shackle	G210	G210	G210	G210	G210	G210	G210	G210	G2140	G2140	G2140	G2140	G2160

PRICES AND SPECIFICATIONS [mm]

Radiolink Accessories		
Part Number	T24-SO	T24-SOSD
Description	Base Station with RS232	125mm LED display wireless

* Manufactured from steel.

RADIOLINK PLUS

